

Bare copper conductor stranding, coil and code table

Soft conductor 6 to 400 and hard-drawn conductor 35 to 95 mm²


BARE STRANDED COPPER · BSCC 006–400 SOFT · BSCD 035–095 HARD

KALOT GROUP · TECHNICAL ILLUSTRATION · NOT TO SCALE

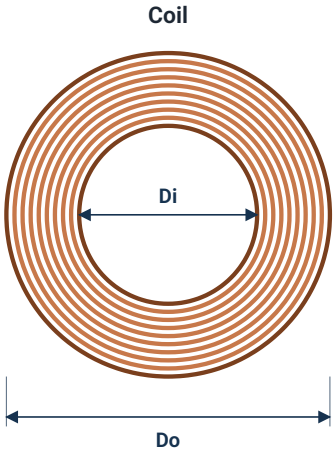


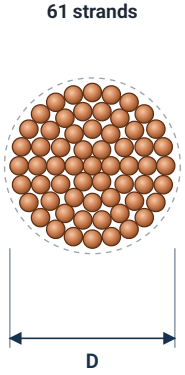


Soft 240 to 400

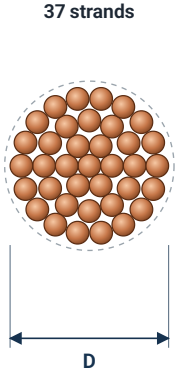

Soft 120 to 185; hard 95

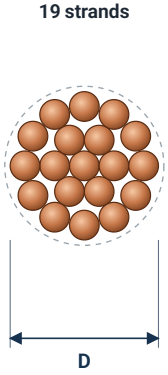

Soft 35 to 95

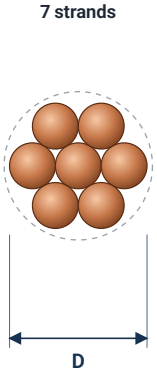

Soft 6 to 25; hard 35 to 70

Hard-drawn conductor

Order code	S (mm²)	Strand	kg/m
BSCD 035	35	7	0.32
BSCD 050	50	7	0.43
BSCD 070	70	7	0.62
BSCD 095	95	37	0.86

Material: bare copper, uncoated

D: conductor outer diameter

Di and Do: coil inner and outer diameter

Supplied as: coil or drum, cut to order length

Hard-drawn: 35 to 70 with 7 strands; 95 with 37 strands

Soft (annealed) conductor

Order code	S (mm²)	Strand	kg/m
BSCC 006	6	7	0.05
BSCC 010	10	7	0.09
BSCC 016	16	7	0.15
BSCC 025	25	7	0.23
BSCC 035	35	19	0.32
BSCC 050	50	19	0.43
BSCC 070	70	19	0.62
BSCC 095	95	19	0.86
BSCC 120	120	37	1.09
BSCC 150	150	37	1.33
BSCC 185	185	37	1.67
BSCC 240	240	61	2.20
BSCC 300	300	61	2.76
BSCC 400	400	61	3.53

Figures are illustrative and not to scale.

We keep improving our products; please confirm final dimensions with our experts.

This document is not contractual; we may update product design, dimensions, weights and images without prior notice.

گروه کالوت
KALOT GROUP
Protect Today For Tomorrow
Since: 1972 تاسیس: ۱۳۵۱
www.kalot.ir • Tel +98 21 2268 8852