
BPH 76 base with DC conductor clamp: assembly drawing

Round conductor 50-70 mm² · dimensions in mm · per KALOT assembly drawing

Front view

Copper conductor 50-70 mm² (down conductor)

View along the conductor

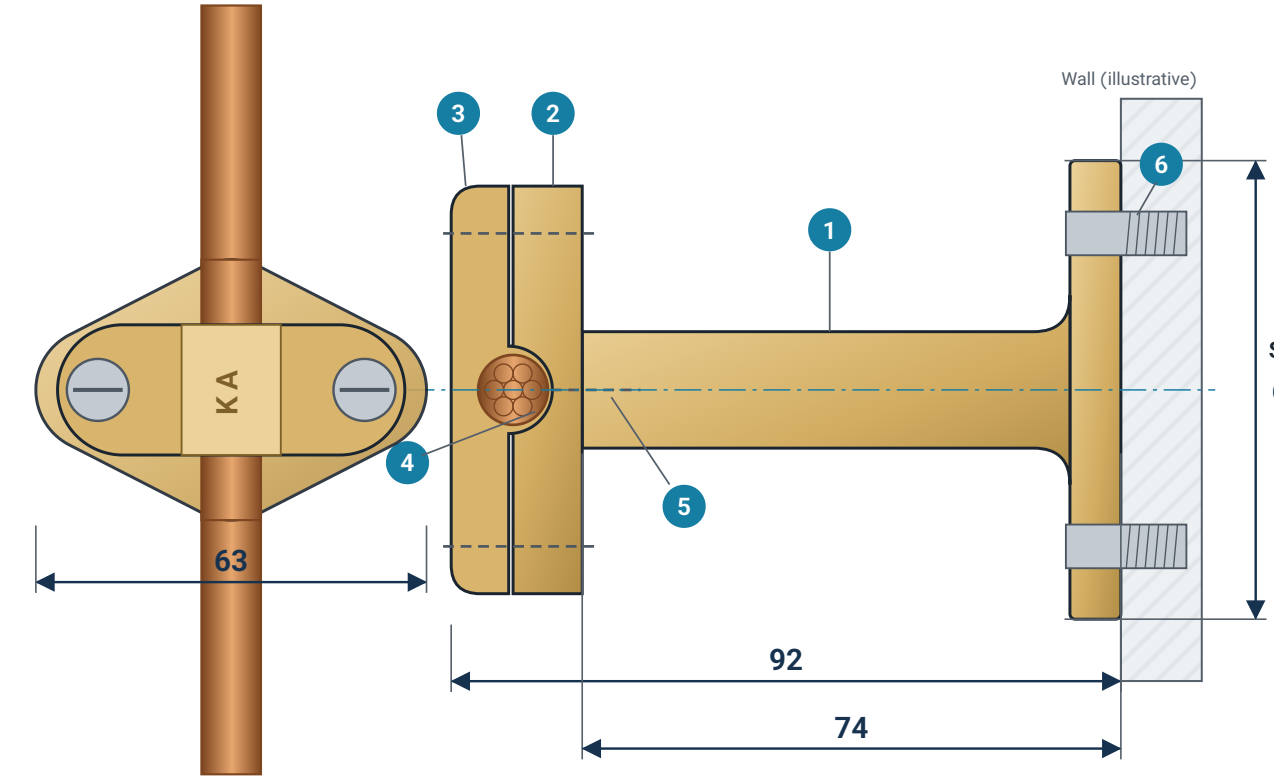

Assembly parts

KALOT BPH 76 base 1
Brass; M6 thread at the arm head

Lower part of DC conductor clamp 50-70 2
Fixed to the arm head by the centre screw

Upper part of DC conductor clamp 50-70 3
With two screws onto the lower part

Stranded copper conductor 50 or 70 mm² 4
63
Between the two clamp parts

Three M6 × 10 countersunk screws 5
DIN EN ISO 2009: clamp

Two M6 × 16 countersunk screws 6
DIN EN ISO 2009: base holes

Dimensions 92, 74 and 63 are from the KALOT Group assembly drawing (01KABPHS); the wall is illustrative.

The 92 figure is a mechanical distance and does not set the design's electrical separation distance.

This document is not contractual; we may update product design, dimensions, weights and images without prior notice.

گروه کالوت
KALOT GROUP
Protect Today For Tomorrow
Since: 1972 تاسیس: ۱۳۵۱
www.kalot.ir · Tel +98 21 2268 8852