
Copper C clamp (CCC) dimensional drawing

Dimensions in mm · not to scale


CCC 1010 … CCC 2424

KALOT GROUP · TECHNICAL ILLUSTRATION · NOT TO SCALE


Front view

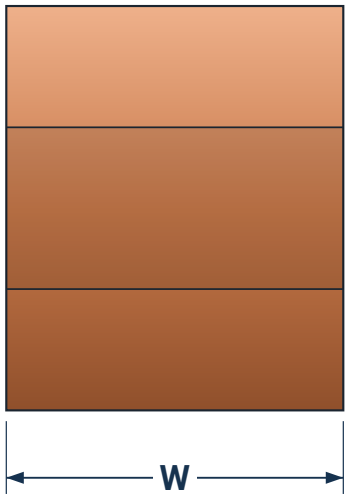


C section (side view)

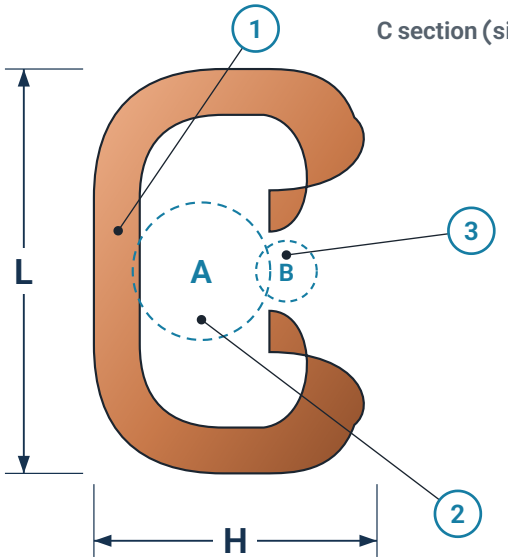

Top view

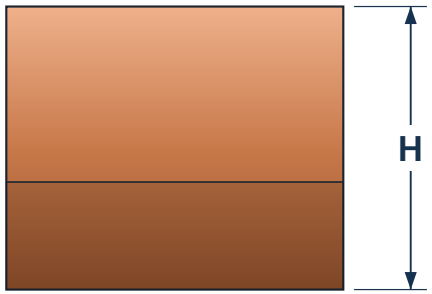

Section after crimping





H	W	L	Branch B	Main conductor A	Code
9	12	13	4-10	10	**CCC 1010**
12	17	19	10-16	10-16	**CCC 1016**
12	17	19	4	16	**CCC 1604**
13	12	20	1.5-10	16-25	**CCC 1610**
12	19	21	10-16	25	**CCC 2516**
15	20	24	10-25	25	**CCC 2525**
15	20	24	1.5-16	35	**CCC 3516**
15	20	27	25-35	35	**CCC 3535**
15	20	27	4-16	50	**CCC 5016**
17	20	27	16-50	50	**CCC 5050**
17	20	27	1.5-25	70	**CCC 7025**
21	28	33	4-35	50-70	**CCC 5035**
21	28	34	35-70	50-70	**CCC 5070**
26	30	41	35-70	70-95	**CCC 7070**
26	30	41	4-35	95	**CCC 9535**
26	30	41	95	70-95	**CCC 7095**
28	30	45	35-120	120	**CCC 1212**
28	30	45	6-70	150	**CCC 1506**
28	30	45	95-150	150	**CCC 1515**
33	35	54	95-185	120-185	**CCC 1218**
33	35	54	70-150	150-185	**CCC 1570**
34	37	54	95-120	240	**CCC 2412**
34	40	54	150-240	240	**CCC 2424**

Conductor cross-section in mm² and dimensions in mm.

Components

1. C-shaped body; copper
2. Main conductor seat (A)
3. Branch conductor seat (B)

Our products are continually improved and some dimensions may be updated; please confirm the final dimensions with our specialists before you buy.

This document is not contractual; we may update product design, dimensions, weights and images without prior notice.

گروه کالوت
KALOT GROUP
Protect Today For Tomorrow
Since: 1972 تاسیس: ۱۳۵۱
www.kalot.ir · Tel +98 21 2268 8852