
Four-way conductor-to-tape clamp: exploded three-dimensional view

Parts and assembly order · illustrative image, not to scale

CTCX 050 · CTCX 070 · CTCX 095

KALOT GROUP · TECHNICAL ILLUSTRATION · NOT TO SCALE

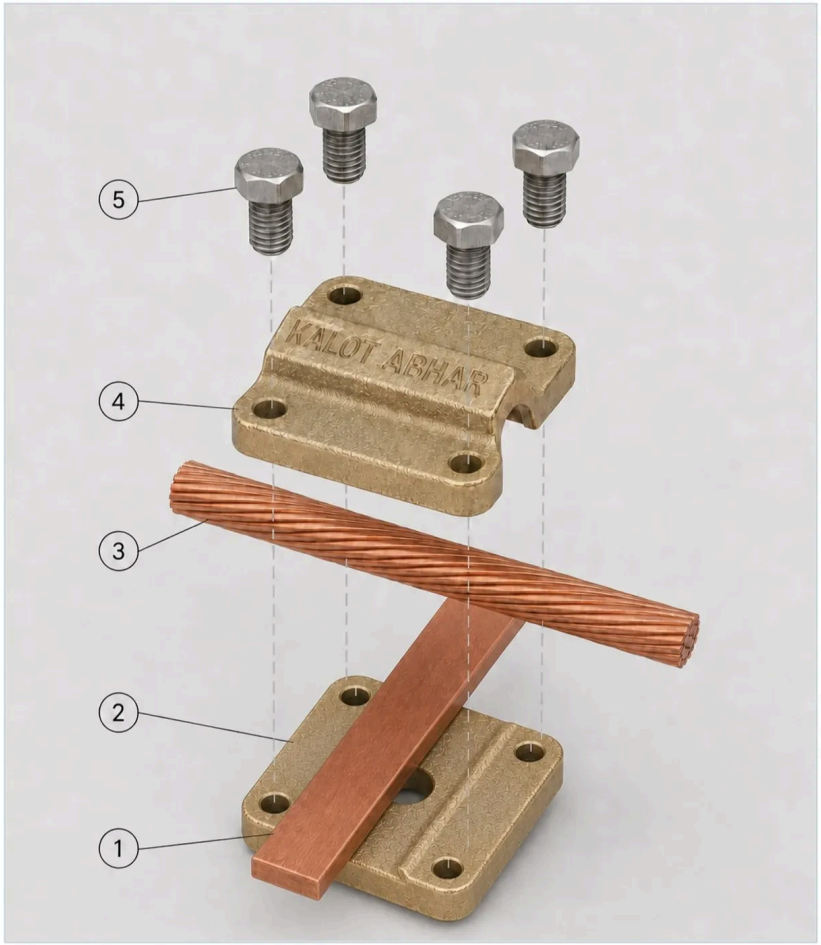

Parts (numbers as in the image)

Brass lower part 1
with tape seating groove

Copper tape 30×3 mm 2
Catalogue pairing for model CTCX 050

Bare stranded copper conductor 50 mm² 3
in the curved channel of the upper part

Brass upper part 4
Boss with 'KALOT ABHAR' lettering

Four stainless steel hex screws 5
pass through both parts

Assembly order:

tape in the lower part's groove, conductor on the tape, upper part on the conductor; then the four screws are tightened gradually and evenly so both conductors are held between the two parts.

The three-dimensional image is illustrative; each model's size is given in the 'Dimensions and product code' table.

For 70 or 95 mm² conductor: model CTCX 070 or CTCX 095.

This document is not contractual; we may update product design, dimensions, weights and images without prior notice.

گروه کالوت
KALOT GROUP
Protect Today For Tomorrow
Since: 1972 تاسیس: ۱۳۵۱
www.kalot.ir · Tel +98 21 2268 8852