

Four-way conductor-to-tape clamp: installation schematic

Through connection of stranded copper conductor to copper tape · not to scale

CTCX 050 · CTCX 070 · CTCX 095

KALOT GROUP · TECHNICAL ILLUSTRATION · NOT TO SCALE

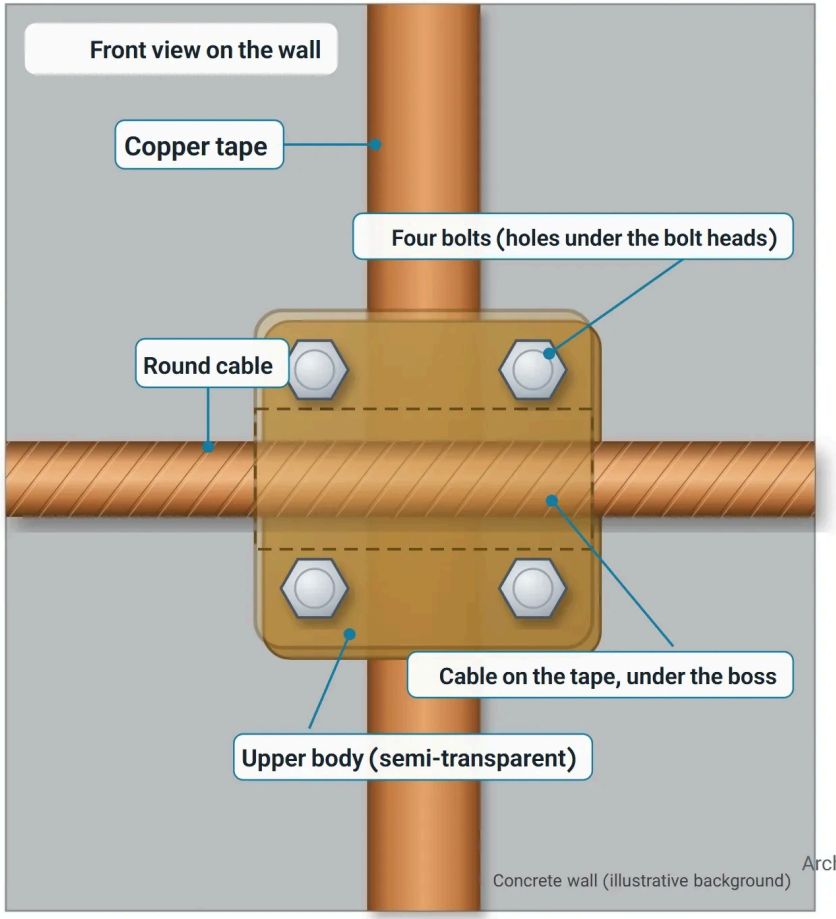

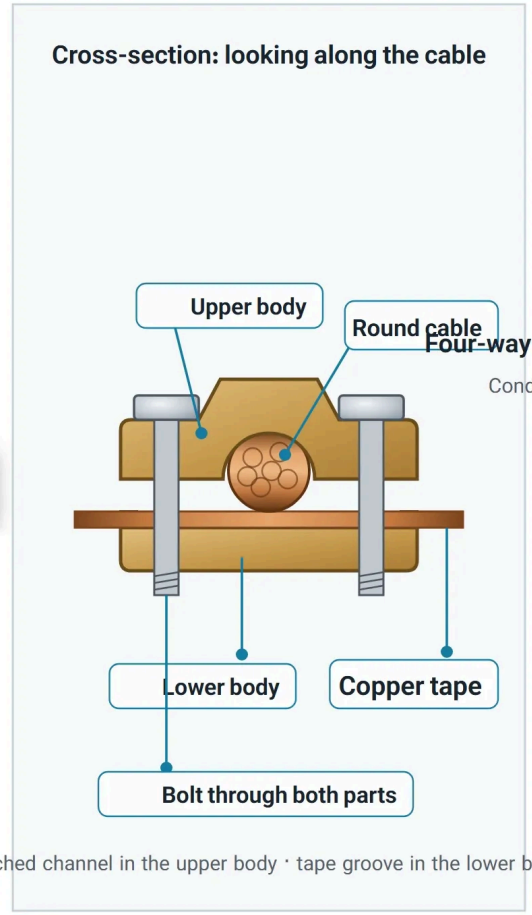

Key

Bare copper tape: vertical
30×3 mm, per the table for model CTCX 050

Bare stranded copper conductor: horizontal
50 mm², per the table for model CTCX 050

Four-way conductor-to-tape clamp CTCX 050, at the crossing
Conductor in the upper part's channel, tape in the lower part's groove

Four stainless steel bolts
Tighten gradually and evenly, in a cross pattern

Concrete wall (illustrative background)
Wall fixing is outside the scope of this figure

Through connection (four-way) at a glance:
The conductor enters left and exits right; the tape enters at the top and exits at the bottom; the clamp holds both conductors between its two parts at the crossing.

The figure is schematic and does not show scale, spacing or wall fixing.
Dimensions follow model CTCX 050 in the catalogue table; for 70 or 95 mm² conductors, choose the matching model.

This document is not contractual; we may update product design, dimensions, weights and images without prior notice.

گروه کالوت
KALOT GROUP
Protect Today For Tomorrow
Since: 1972 تاسیس: ۱۳۵۱
www.kalot.ir · Tel +98 21 2268 8852