
Dimensional drawing of the clamp for connecting galvanised round wire to reinforcing bar

L plate length · B plate width · e bolt spacing · H assembly height · not to scale


RRCG 1016

KALOT GROUP · TECHNICAL ILLUSTRATION · NOT TO SCALE


Front view (conductors end-on)

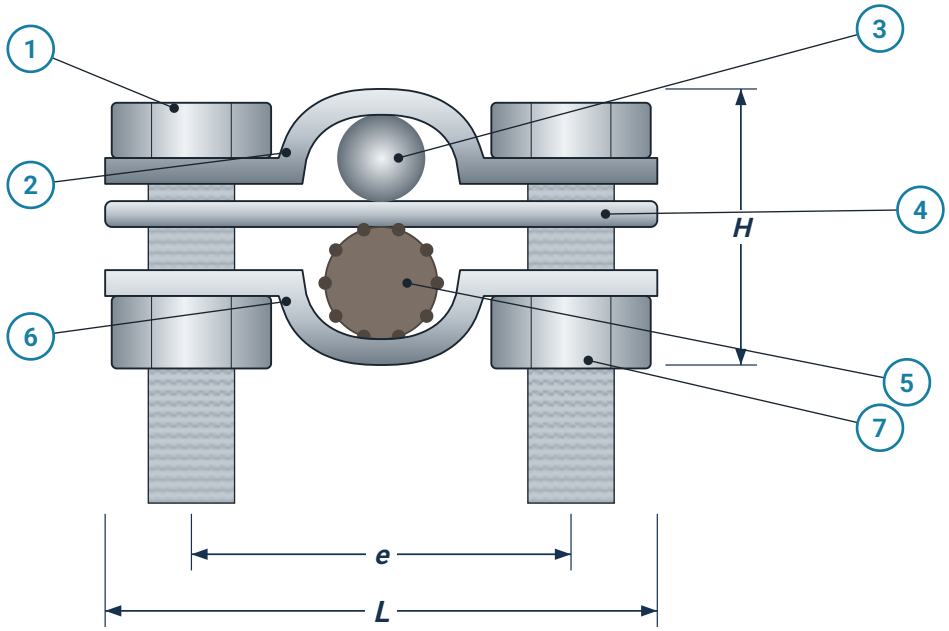


Top view

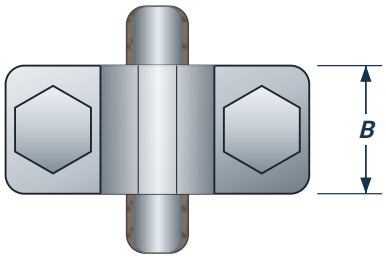

Side view



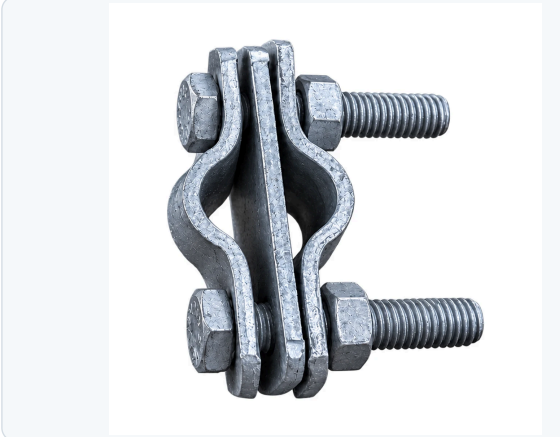

Number of plates	Bolts and nuts	Bar diameter over ribs (mm)	Round wire diameter (mm)	Code
3	2 × M8	8-16	8-10	**RRCG 1016**

Components

1. Galvanised hex bolt (2 pcs)
2. Saddled top plate; saddle facing up
3. Galvanised wire (round conductor)
4. Flat middle plate; separates the two conductors
5. Reinforcing bar
6. Saddled bottom plate; saddle facing down
7. Galvanised hex nut (2 pcs)

Our products are continually improved and some dimensions may be updated; please confirm the final dimensions with our specialists before you buy.

This document is not contractual; we may update product design, dimensions, weights and images without prior notice.

گروه کالوت
KALOT GROUP
Protect Today For Tomorrow
Since: 1972 تاسیس: ۱۳۵۱
www.kalot.ir · Tel +98 21 2268 8852