Conductor connection modes for the stainless steel earth rod


G clamp for conductor, A clamp for tape, two conductors on one earth rod

STAINLESS STEEL EARTH ROD · AISI 304L / 316 · Ø16 · Ø20 · M10

KALOT GROUP · TECHNICAL ILLUSTRATION · NOT TO SCALE

Two conductors on one earth rod 3


Each conductor with its own G clamp

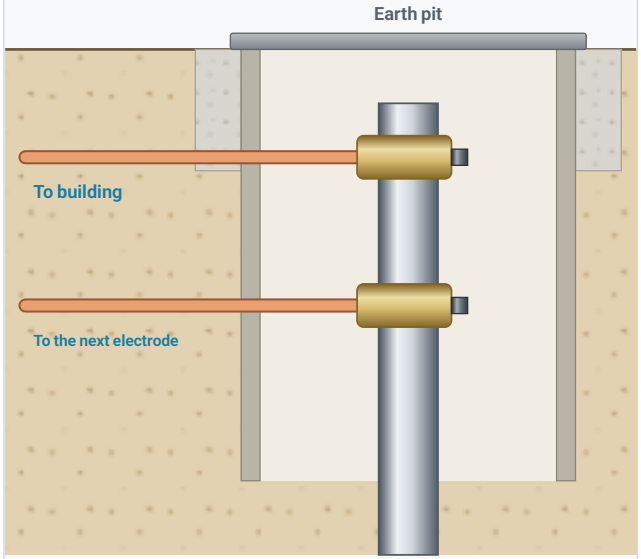

Two G clamps on the earth rod head: one for the conductor to the building, one for the bonding conductor to the next electrode.

Tape with A clamp 2


KALOT A clamp; view from above the earth rod

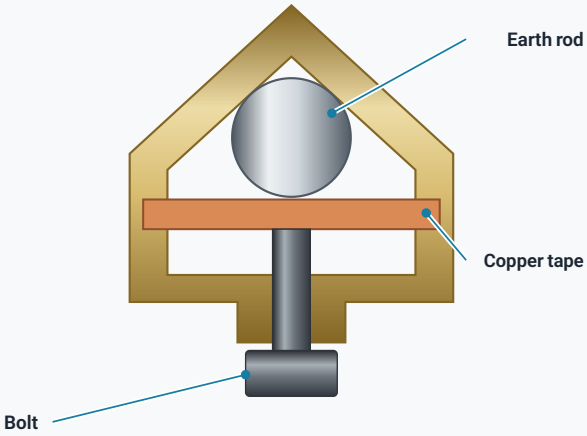

The tape passes through the clamp opening and the lower bolt presses it against the earth rod at the top of the body.

Copper conductor with G clamp 1

KALOT G clamp; view from above the earth rod

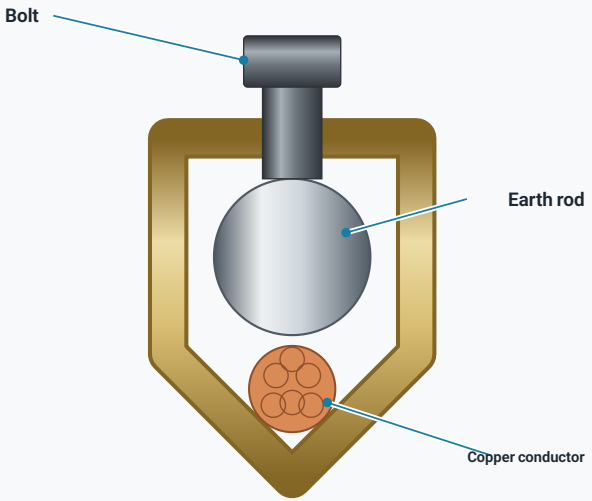

The clamp bolt presses the earth rod onto the copper conductor in the V-shaped base of the body; each clamp takes one conductor.

Place bolted joints inside the earth pit so they stay dry and can be checked and retightened at periodic inspections.

Illustrative and not to scale; choose the clamp size by earth rod diameter and conductor cross-section.
We keep improving our products; please confirm final dimensions with our experts.

This document is not contractual; we may update product design, dimensions, weights and images without prior notice.

گروه کالوت
KALOT GROUP
Protect Today For Tomorrow
Since: 1972 تاسیس: ۱۳۵۱
www.kalot.ir · Tel +98 21 2268 8852