
Technical drawing of the U clamp for connecting conductor to earth rod and reinforcing bar (UBDV)

UBDV 0906 · UBDV 1406 · UBDV 1416 · UBDV 1435 · UBDV 2070 · UBDV 2012

Dimensions in mm · not to scale

KALOT GROUP · TECHNICAL ILLUSTRATION · NOT TO SCALE

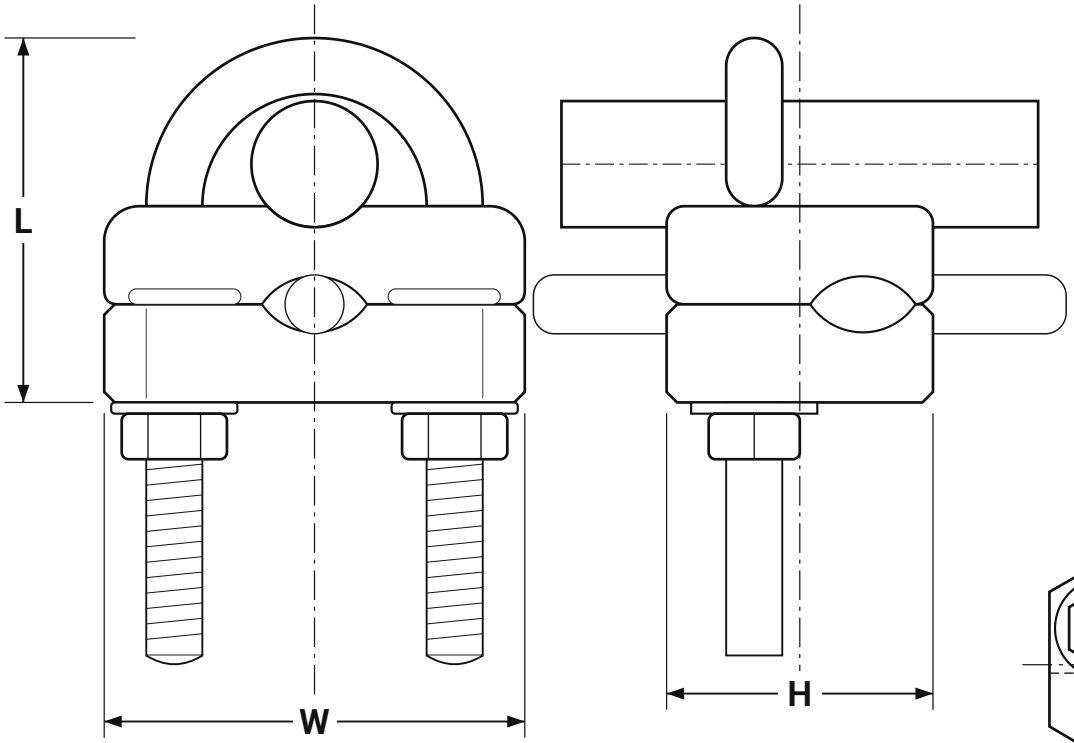


Front view

Side view

Conductor cross-section (mm²)	Earth rod diameter or reinforcing bar (mm)	Code
6-35	9.5-12.5	**UBDV 0906**
6-35	14	**UBDV 1406**
16-70	14-16	**UBDV 1416**
35-150	14-20	**UBDV 1435**
70-185	20	**UBDV 2070**
120-300	20	**UBDV 2012**

Diameter in mm and cross-section in square millimetres; please confirm L, W and H with our specialists before ordering.

View from below

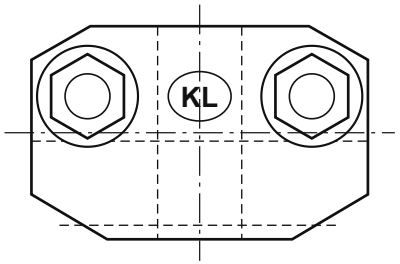

Notes

1. Plates: brass; U-bolt, washer and nuts: stainless steel
2. Confirm L, W and H with our specialists before ordering
3. Conductor in line with the earth rod through the centre hole, or perpendicular to it through the cross hole
4. Tighten the nuts to the manufacturer's instructions
5. We keep improving our products, and some dimensions may be updated; please confirm final dimensions with our specialists before ordering.

This document is not contractual; we may update product design, dimensions, weights and images without prior notice.

گروه کالوت
KALOT GROUP
Protect Today For Tomorrow
Since: 1972 تاسیس: ۱۳۵۱
www.kalot.ir · Tel +98 21 2268 8852