
Copper busbar dimensions and code table

Twenty sizes from 20 × 3 to 120 × 20 mm, in 4 m lengths

BARE COPPER BAR · BCB 2003–1220

KALOT GROUP · TECHNICAL ILLUSTRATION · NOT TO SCALE

copper busbar

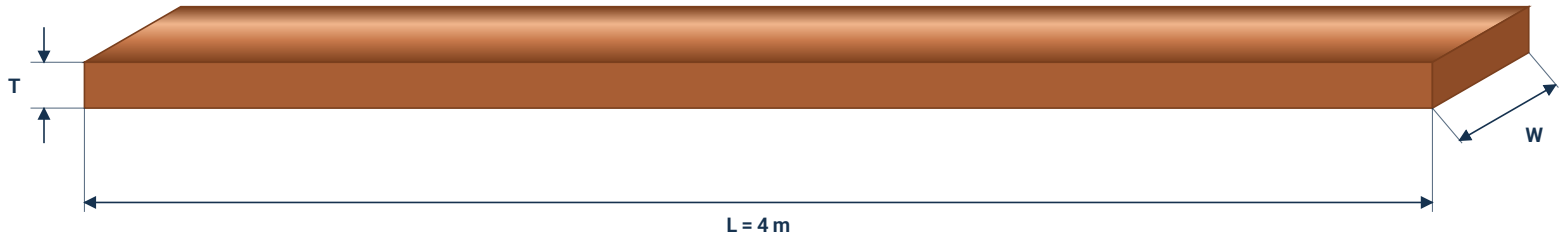

Material: copper, bare

W: busbar width

T: busbar thickness

L: length: 4 m

S: cross-section

copper busbar

Order code	W × T (mm)	S (mm²)	kg/m	kg / 4 m
BCB 2003	20 × 3	60	0.53	2.14
BCB 2005	20 × 5	100	0.89	3.56
BCB 2505	25 × 5	125	1.11	4.45
BCB 3005	30 × 5	150	1.34	5.34
BCB 4005	40 × 5	200	1.78	7.12
BCB 5005	50 × 5	250	2.23	8.90
BCB 6005	60 × 5	300	2.67	10.68
BCB 8005	80 × 5	400	3.56	14.24
BCB 1005	100 × 5	500	4.45	17.80
BCB 3010	30 × 10	300	2.67	10.68
BCB 4010	40 × 10	400	3.56	14.24
BCB 5010	50 × 10	500	4.45	17.80
BCB 6010	60 × 10	600	5.34	21.36
BCB 8010	80 × 10	800	7.12	28.48
BCB 1010	100 × 10	1000	8.90	35.60
BCB 6020	60 × 20	1200	10.68	42.72

BCB 1210	120 × 10	1200	10.68	42.72
BCB 1015	100 × 15	1500	13.35	53.40
BCB 1020	100 × 20	2000	17.80	71.20
BCB 1220	120 × 20	2400	21.36	85.44

Figures are illustrative and not to scale.

We keep improving our products; please confirm final dimensions with our experts.

This document is not contractual; we may update product design, dimensions, weights and images without prior notice.

گروه کالوت
KALOT GROUP
Protect Today For Tomorrow
Since: 1972 تاسیس: ۱۳۵۱
www.kalot.ir • Tel +98 21 2268 8852