Galvanised earth rod dimensional drawing


One end pointed, the other flat; 16 and 20 diameter, 1500 and 2000 mm long

GALVANIZED STEEL EARTH ROD · GVER · HOT-DIP 50–70 µm · Ø16 · Ø20


KALOT GROUP · TECHNICAL ILLUSTRATION · NOT TO SCALE

One-piece earth rod

One end pointed, the other flat, unthreaded

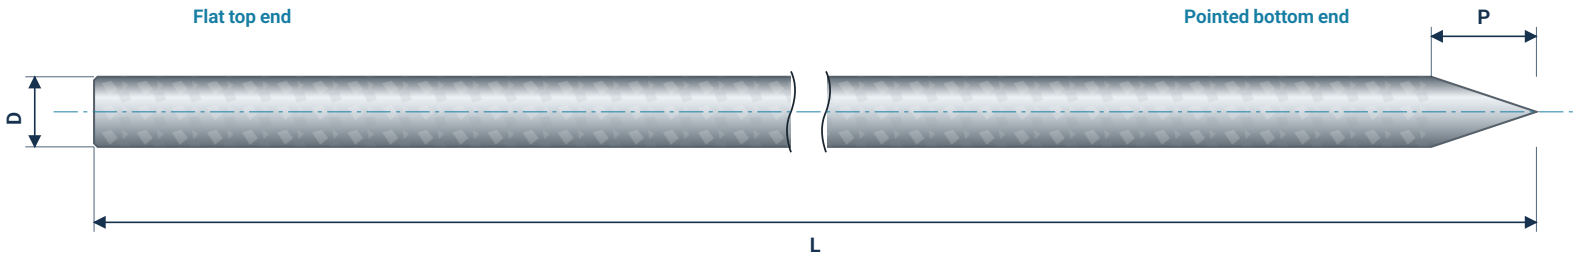

Order code	D (mm)	L (mm)	P (mm)	Weight (kg)
GVER 1615	16	1500	20	2.38
GVER 1620	16	2000	20	3.18
GVER 2015	20	1500	20	3.71
GVER 2020	20	2000	20	4.95



Flat end view

Material: S275 steel, hot-dip galvanised

Coating: hot-dip galvanised, 50 to 70 microns

Diameter: 16 and 20 mm

Length: 1500 and 2000 mm

Point length P: 20 mm

Construction: one piece, unthreaded

Conductor connection: galvanised conductors and clamps only

Dimensions in mm.

We keep improving our products; please confirm final dimensions with our experts.

This document is not contractual; we may update product design, dimensions, weights and images without prior notice.

گروه کالوت
KALOT GROUP
Protect Today For Tomorrow
Since: 1972 تاسیس: ۱۳۵۱
www.kalot.ir · Tel +98 21 2268 8852